

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

1724

Applicant: G. S. Park  
Serial No. 10/071,611  
Conf. No. 1808  
Filed: February 8, 2002  
Allowed: December 09, 2003  
For: WATER PURIFYING DEVICE  
Art Unit: 1724  
Examiner: F. Lawrence

**CERTIFICATE OF MAILING**

I hereby certify that this paper and the attached papers are being deposited with the United States Postal Service as first class (Priority) mail in an envelope addressed to:

**Mail Stop Issue Fee**  
Commissioner for Patents  
U.S. Patent and Trademark Office  
P.O. Box 1450  
Alexandria, Virginia 22313-1450, on this date.

3-8-04  
Date

*Jennifer Val*  
Signature

**MAIL STOP ISSUE FEE**

Commissioner for Patents  
U.S. Patent and Trademark Office  
PO Box 1450  
Alexandria, VA 22313-1450

**TRANSMITTAL OF CERTIFIED COPY OF PRIORITY DOCUMENTS**

Sir:

Enclosed for filing in connection with the above-referenced patent application is a certified copy of the priority document, PCT/KR2001/000977 and Korean Patent Application No. 10-2000-0031721. These certified copies are being provided in accordance with the Notice of Allowance mailed December 9, 2003. Applicants have previously provided the Declaration and Power of Attorney for Patent Application executed by each inventor, claiming priority.

Accordingly, it is believed that all of the Examiner's requirements noted in the Notice of Allowance and associated papers have been met.

- [ X ] The Commissioner is hereby authorized to charge any fee, including any submitted herewith if the attached check(s) is in the wrong amount or otherwise improper or missing, that may be due in connection with this and the attached papers, or with this application during its entire pendency to or to credit any overpayment to Deposit Account No. 50-1213. A copy of this sheet is enclosed

Respectfully submitted,  
HELLER, EHRMAN, WHITE & McAULIFFE LLP

By: *David A. Hall*

David A. Hall

Registration No. 32,233

Attorney Docket No. 38490-6136

**Address all correspondence to:**

HELLER, EHRMAN, WHITE & McAULIFFE LLP

4350 La Jolla Village Drive, Suite 700

San Diego, CA 92122-1246

Telephone: (858) 450-8400 - Facsimile: (858) 450-8499



별첨 사본은 아래 출원의 원본과 동일함을 증명함.

This is to certify that the following application annexed hereto is a true copy from the records of the Korean Intellectual Property Office.

출원 번호 : PCT/KR2001/000977  
Application Number

출원 년 월 일 : 2001년 06월 08일  
Date of Application JUN 08, 2001


출원 인 : REDOX CO., LTD.  
Applicant(s)



2004      년 03      월 03      일

특      허      청

COMMISSIONER




## PCT REQUEST

1/4

2001OPA2246


6-1-2001-0004926-89

6.2001 03:22:23 PM

0	For receiving Office	 <b>PCT/KR01/00977</b> 2001.06.08 수관관청 (정통제)	<b>PCT/KR01/00977</b> <b>08 JUNE 2001 (08.06.01)</b> Korean Intellectual Property Office P C T International Application
0-1	International Applicant		
0-2	International Filing Date		
0-3	Name of receiving Office International Applicant		
0-4	Form PCT/RO/101 PCT Request Prepared using	PCT-EASY Version 2.91 (updated 01.01.2001)	
0-5	Petition The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty		
0-6	Receiving Office (specified by the applicant)	Korean Industrial Property Office (RO/KR)	
0-7	Applicant's or agent's file reference	2001OPA2246	
I	Title of invention	WATER PURIFYING DEVICE	
II	Applicant		
II-1	This person is:	applicant only	
II-2	Applicant for	all designated States except US	
II-4	Name	REDOX CO., LTD.	
II-5	Address:	559 Songnae-dong, Sosa-gu, Bucheon-shi 442-040 Kyongki-do Republic of Korea	
II-6	State of nationality	KR	
II-7	State of residence	KR	
III-1	Applicant and/or inventor		
III-1-1	This person is:	applicant and inventor	
III-1-2	Applicant for	US only	
III-1-4	Name (LAST, First)	PARK, Gun Shik	
III-1-5	Address:	(3/4) 591-16 Songnae-dong, Sosa-gu, Bucheon-shi 442-040 Kyongki-do Republic of Korea	
III-1-6	State of nationality	KR	
III-1-7	State of residence	KR	

국방관련출원여부검토필

(특허법 시행령12조)



IV-1	Agent or common representative; or address for correspondence The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name (LAST, First)	LEE, Hoo Dong
IV-1-2	Address:	7th-11th Floors, Hankook Tire Bldg, 647-15, Yoksam-dong, Kangnam-ku, 135-080 Seoul Republic of Korea
IV-1-3	Telephone No.	82 2 3404 0968
IV-1-4	Facsimile No.	82 2 3404 0004
IV-1-5	e-mail	patentmail@bkl.co.kr
V	Designation of States	
V-1	Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AP: GH GM KE LS MW MZ SD SL SZ TZ UG ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE CH&LI CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE TR and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT
V-2	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE AG AL AM AT AU AZ BA BB BG BR BY BZ CA CH&LI CN CR CU CZ DE DK DM DZ EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KZ LC LK LR LS LT LU LV MA MD MG MK MN MW MX MZ NO NZ PL PT RO RU SD SE SG SI SK SL TJ TM TR TT TZ UA UG US UZ VN YU ZA ZW

V-5	<b>Precautionary Designation Statement</b> In addition to the designations made under items V-1, V-2 and V-3, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except any designation(s) of the State(s) indicated under item V-6 below. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit.		
V-6	<b>Exclusion(s) from precautionary designations</b>	NONE	
VI-1	<b>Priority claim of earlier national application</b>		
VI-1-1	Filing date	09 June 2000 (09.06.2000)	
VI-1-2	Number	2000-31721	
VI-1-3	Country	KR	
VII-1	<b>International Searching Authority Chosen</b>	Korean Industrial Property Office (KIPO) (ISA/KR)	
VIII	<b>Check list</b>	number of sheets	electronic file(s) attached
VIII-1	Request	4	-
VIII-2	Description	13	-
VIII-3	Claims	2	-
VIII-4	Abstract	1	EZABST00.TXT
VIII-5	Drawings	2	-
VIII-7	TOTAL	22	
	<b>Accompanying items</b>	paper document(s) attached	electronic file(s) attached
VIII-8	Fee calculation sheet	✓	-
VIII-16	PCT-EASY diskette	-	diskette
VIII-18	Figure of the drawings which should accompany the abstract	1	
VIII-19	Language of filing of the international application	English	
IX-1	<b>Signature of applicant or agent</b>		
IX-1-1	Name (LAST, First)	LEE, Hoo Dong	

## FOR RECEIVING OFFICE USE ONLY

10-1	Date of actual receipt of the purported international application	08 JUNE 2001 (08.06.01)
10-2	<b>Drawings:</b>	
10-2-1	Received	
10-2-2	Not received	
10-3	Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application	

P REQUEST

2001OPA2246

Original (for SUBMISSION) - printed on 08.06.2001 03:22:23 PM

10-4	Date of timely receipt of the required corrections under PCT Article 11(2)	
10-5	International Searching Authority	ISA/KR
10-6	Transmittal of search copy delayed until search fee is paid	

## FOR INTERNATIONAL BUREAU USE ONLY

11-1	Date of receipt of the record copy by the International Bureau	
------	--	--

**ANNEX - FEE CALCULATION SHEET**

1/2

2001OPA2246

Original (for SUBMISSION) - printed on 08.06.2001 03:22:23 PM

(This sheet is not part of and does not count as a sheet of the international application)

0	For receiving Office use only			
0-1	International Application No.	PCT/KR 01/00977		
0-2	Date stamp of the receiving Office	08.06.2001		
0-4	Form - PCT/RO/101 (Annex) PCT Fee Calculation Sheet			
0-4-1	Prepared using	PCT-EASY Version 2.91 (updated 01.01.2001)		
0-9	Applicant's or agent's file reference	2001OPA2246		
2	Applicant	REDOX CO., LTD., et al.		
12	Calculation of prescribed fees	fee amount/multiplier	total amounts (KRW)	
12-1	Transmittal fee T	⇒	45,000	
12-2	Search fee S	⇒	150,000	
12-3	International fee			
	Basic fee			
	(first 30 sheets) b1	500,000		
12-4	Remaining sheets	0		
12-5	Additional amount (X)	12,000		
12-6	Total additional amount b2	0		
12-7	b1 + b2 = B	500,000		
12-8	Designation fees			
	Number of designations contained in international application	86		
12-9	Number of designation fees payable (maximum 6)	6		
12-10	Amount of designation fee (X)	108,000		
12-11	Total designation fees D	648,000		
12-12	PCT-EASY fee reduction R	-154,000		
12-13	Total International fee (B+D-R) I	⇒	994,000	
12-17	TOTAL FEES PAYABLE (T+S+I+P)	⇒	1,189,000	
12-19	Mode of payment	cash		

**VALIDATION LOG AND REMARKS**

13-2-2	Validation messages States	Green? More designations could be made. The following States have not been designated: KR. Please verify.
13-2-3	Validation messages Names	Green? Applicant 1.:Telephone No. missing
		Green? Applicant 1.:Facsimile No. missing

## ANNEX - FEE CALCULATION SHEET

2001OPA2246

Original (for SUBMISSION) - printed on 08.06.2001 03:22:23 PM

		<p>Green?</p> <p>Applicant 2.: Where several first/given names are indicated, they should preferably be separated by a comma. Please verify.</p>
		<p>Green?</p> <p>Agent 1.: Where several first/given names are indicated, they should preferably be separated by a comma. Please verify.</p>
13-2-6	Validation messages Contents	<p>Yellow!</p> <p>The power of attorney or a copy of the general power of attorney will need to be furnished unless all applicants sign the request form.</p>
		<p>Green?</p> <p>Priority 1. The priority document is not enclosed. (The applicant must furnish it within 16 months from the earliest priority date claimed)</p>
13-2-1 0	Validation messages For receiving Office/International Bureau use only	<p>Green?</p> <p>Verify electronic data for consistency against printed form.</p>



## WATER PURIFYING DEVICE

## BACKGROUND OF THE INVENTION

## 5           1.       Field of the Invention

The present invention relates to a water purifying device, and in particular to an improved water purifying device which can efficiently purify water without using a special drug or purifying facility, by simplifying a structure to be easily put in a purifying place such as an aquarium, pond and factory by using an electrolytic analysis of a Volta cell.

## 2.       Description of the Background Art

In general, a water purifying device has been used for potable water or industrial water. A water purifying device for a pond, aquarium and fish basin including an organism has not been developed. Since the aquarium or fish basin does not have the water purifying device, it is inconvenient to periodically change water or clean a water tank.

20       Especially, to change water of a large aquarium or fish basin is complicated, and requires much time and cost. In addition, moss is grown and various foreign substances are generated in stagnant water such as a pond, to decay the water.

## SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide a water purifying device which can be easily installed in water, for disinfecting bacteria, removing odor, and facilitating growth of aquatic plants and fishes.

In order to achieve the above-described object of the present invention, there is provided a water purifying device including: a cell unit having a volta cell and completed cell formed by coiling a metal coil around a volta cell, and being surrounded with an external housing consisting of ceramic for obtaining far infrared rays and having a plurality of through holes at its whole circumferential surface for water flow; a lump unit having a conductive lump, and being surrounded with an external housing consisting of ceramic for obtaining far infrared rays, and having a plurality of through holes at its whole circumferential surface for water flow; and a connection line for connecting the cell unit and the lump unit.

According to the present invention, the Volta cell is formed in a ring shape, and the external housings of the cell unit and the lump unit have natural and familiar shapes according to scenic spots and places of historic interest or animals. In addition, a connector is used between the cell unit and the lump unit to easily install and operate the

water purifying device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5       The present invention will become better understood with reference to the accompanying drawings which are given only by way of illustration and thus are not limitative of the present invention, wherein:

FIG. 1 is a structure diagram illustrating a water  
10 purifying device in accordance with the present invention;

FIG. 2 illustrates a completed cell and a conductive lump of FIG. 1;

FIG. 3 shows a state where the water purifying device is put in water in accordance with the present invention;  
15 and

FIG. 4 illustrates another example of a Volta cell of the water purifying device in accordance with the present invention.

#### 20 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Firstly, a theoretical background of a electrochemical reaction for a water purifying device of the present invention will now be described.

25       In general, when a chemical reaction for generating a

product from a reactant is performed, an oxidation state variation of partial or whole atoms which are participated in reaction, namely a state variation of the atoms is followed. When electrons are transferred according to the  
5 change of the atoms state, it is called the electrochemical reaction.

The electrochemical reaction relates to various fields of batteries, electrometallurgy, metal surface treatment and metal corrosion or the like, and is especially employed to  
10 fabricate a device for obtaining an electric work. In addition, various measurement devices have been developed on the basis of the electrochemical reaction.

When electric substances such as metal ions relate to the chemical reaction in an aqueous solution, molten salt or  
15 solid electrolyte, or are diffused due to a different density, an electromotive force (emf) is generated. Here, an electric work can be obtained from the reaction system by forming an external electric circuit outside the solution. Such a system is called an electrochemical cell.

20 In general, when a metal is put in a solution having its own ions, a potential difference is generated between the metal and solution. Such a potential difference is called a half-cell potential or single electrode cell potential. It is convenient to quantize an ionization  
25 tendency by using the single electrode cell potential.

However, it is impossible to product a cell consisting of one electrode and to measure a potential of the single electrode cell. However, a concept of the single electrode cell potential is useful. Therefore, for example, a potential value of a single electrode can be relatively measured by selecting a specific standard single electrode having a potential of zero, and forming an electrochemical cell with the single electrode and another single electrode.

The standard single electrode used in the aqueous solution is a standard hydrogen electrode (SHE), which is a hydrogen electrode containing a gas below a atmospheric pressure of one contacted with an aqueous solution containing hydrogen ions having activity of one. A standard single electrode of metal is composed of pure metal which is contacted with a solution containing it's own self metal ions with activity of one (generally, a standard state has solution containing 1g-mole of metal ions). A standard potential of the single electrode of the metal is decided comparing with the standard hydrogen electrode.

The water purifying device in accordance with a preferred embodiment of the present invention will now be described in detail with reference to the accompanying drawings.

FIG. 1 is a schematic cross-sectional diagram illustrating the water purifying device in accordance with

the present invention, and FIG. 2 illustrates a Volta cell and a conductive lump of FIG. 1, when they are separated from external housings.

Referring to FIG. 1 and 2, the water purifying device includes: a cell unit 15 having a Volta cell 1 and being surrounded with an external housing 7 consisting of ceramic; and a lump unit 17 being connected to the cell unit 15 through a connection line 11 consisting of a metal coil, and having a conductive lump 9 of a predetermined volume and being surrounded with an external housing 13 consisting of ceramic.

The cell unit 15 includes a completed cell 5 inside. As illustrated in FIG. 2, the completed cell 5 is formed by coiling the metal coil 3 around the ring-shaped Volta cell 1.

In this embodiment, the Volta cell 1 is formed in a ring shape, but may be formed in a bar or other shapes. The Volta cell 1 is formed by combinations of non-ferrous metals, for example aluminum alloy and zinc. The metal coil 3 coiling around the ring-shaped Volta cell 1 consists of copper alloy or silver.

The external housing 7 receiving the completed cell 5 consisting of the ring-shaped Volta cell 1 and the metal coil consists of ceramic. A plurality of through holes 4 are formed on the entire housing 7 so that water can inwardly flow toward the internal cell 5. In order to fix the

internal cell 5 in the housing 7, a plurality of protruding strips 6 are formed around the Volta cell 1. Here, fixing screws 8 are inserted into the protruding strips 6 to fix the cell 5 in the housing 7.

5       The conductive lump unit 17 includes a conductive lump 9 and is surrounded with an external housing 13 consisting of ceramic. A plurality of through holes 14 are formed at the whole circumferential surface of the housing 13 for water flow. The lump 9 consists of a non-ferrous metal scrap  
10   such as Al or Zn.

      The external housings 7, 13 of the cell unit 15 and the lump unit 17 have suitable shapes according to a peripheral environment. For example, when the water purifying device is installed in a pond of scenic spots and  
15   places of historic interest, it has a related shape or animal shape such as a turtle or rabbit.

      The connection line 11 connecting the cell unit 15 and the lump unit 17 preferably is a metal coil consisting of a copper alloy or silver, and may include a connector 19 for  
20   easily installing and operating the water purifying device at its middle portion.

      FIG. 3 shows a state where the cell unit 15 and the lump unit 15 of the water purifying device is installed in a water tank in accordance with the present invention. The  
25   cell unit 15 and the lump unit 17 are positioned in sand 21

of the water tank by a predetermined thickness, having their upper portions exposed from the sand 21. Therefore, since the exposed external housings 7, 13 of the cell unit 15 and the lump unit 17 is exposed exteriorly, it is desired to have natural shapes according to a shape of the water tank.

FIG. 4 illustrates another example of the Volta cell of the water purifying device in accordance with the present invention. The Volta cell 31 is formed in a bar shape. A metal coil 33 is coiled around the Volta cell 31. That is, the Volta cell may be formed in various shapes.

The water purifying principle and operation of the water purifying device in accordance with the present invention will now be explained.

For reference, the water purifying device is based upon the technical theory suggested in Korean Patent Reg. No. 188328 (entitled by 'Device for Preventing Corrosion and Scale in Steel Pipe Line) of the applicant concerned. The technical theory will now be described with reference to FIG. 3.

When a unit including the Volta cell 1 and the external housing 7 being positioned outside the Volta cell 1 and consisting of ceramic for generating far infrared rays wave, namely the cell unit 15 is positioned in water, water is polarized. Such polarization is generated due to a formation of oxidation and reduction potential on electrode



in water.

A property of tap water will now be explained.

That is, a total hardness of the tap water ranges from 100 to 150ppm, a total dissolved substance ranges from 129 to 200ppm, an electric conductivity ranges from 150 to 200 $\mu$ s/cm<sup>2</sup>, Cl<sup>-</sup> is over 10ppm and a frequency is about 120Hz.

In the case of the tap water, a center portion of the ring-shaped Volta cell 1 becomes an anode (+), an oxidation reduction potential (ORP) ranges from 400 to 600mV, and a hydrogen density ranges from Ph 6 to 4.

An end portion of the metal coil 3 coiling around the Volta cell 1 becomes a cathode, the ORP ranges from -400 to -600mV, and the hydrogen density ranges from Ph 8 to 10.

On the other hand, a variation of the ORP is represented by the following formula:

$$E [\pm mV] = E_o - \frac{Rt}{nf} \log \frac{C_{red}}{C_{ox}}$$

wherein, E<sub>o</sub> denotes a standard potential of water ( $\pm$  mV), nf denotes a electron Faraday constant, Rf denotes a gas temperature constant, C<sub>ox</sub> denotes a total oxidation group, and C<sub>red</sub> denotes a total reduction group.

As a result, an oxidation C<sub>ox</sub> group, for example Cl<sup>-</sup>, O, O<sub>2</sub>, O<sub>3</sub> and OH<sup>-</sup> are formed in the anode, and a reduction C<sub>red</sub>

group, for example  $\text{Na}^+$ ,  $\text{H}^+$  and  $\text{H}_2\text{O}$  are formed in the cathode, thus to be saturated.

Here, oxygen is activated to re-combine two electrons ( $\text{e}^-$ ) due to instability of hydrogen (H) having a potential of zero, thereby water molecules are activated.

On the other hand, a dissolved oxygen (DO) in water is maximally 20.9% in an air pressure, and calculated by the following formula and an air contacting area ( $\text{cm}^2$ ) of water:

DO = H \* Xo (H : Henry constant, Xo : air oxygen amount) [mg O/l]

An amount of saturated water is maintained according to activation of the water molecules. In the case of the tap water, an active frequency of the water molecules is about 120Hz. Here, the water molecules are continuously activated by far infrared rays wave, without increasing a line width of the far infrared rays wave.

In the water purifying device of the present invention, the Volta cell 1 coiled by the coil 3 and the lump 9 consisting of the conductive non-ferrous metal are combined, and the external housings 7, 13 receiving the cell 5 and the lump 9 consist of high purity ceramic, to apply the far infrared rays of about 5 to  $20\mu\text{m}/\text{cm}^2$ .

As described above, hydrogen (H) having a potential of zero is sensitive to slight electric charges and unstable. When a process of re-combining hydrogen and oxygen is

repeated, a pole of the water molecules is maintained at about Ph 7.5 due to activation, thus a cluster of the water molecules increase in number.

When strong electricity is applied to the potential of the water molecules, fat or protein of microorganism cells, nucleic acid and enzymes is damaged, and thus such elements are not normally operated. Especially, it has been publicly known that a damage of nucleic acid influences on genetic information of DNA and RNA.

A maximal water potential of the water purifying device of the present invention is 900mV (tap water). Considering that a water potential of the microorganism is only a few mV, the water purifying device sufficiently disinfects bacteria of the microorganism.

On the other hand, generation of algae (chlorophyat) is visible in the fish basin due to adhering substances generated from the algae by growth of the microorganisms and electrostatic combinations (electric ions).

Accordingly, generation of bacteria is prevented, and a hydroxyl group ( $\text{OH}^-$ ) and a hydrogen group ( $\text{H}^+$ ) of a contaminant are alternated. As a result, both ions exclude each other, and thus bacteria is not strangulated in the water tank.

The center portion of the ring-shaped Volta cell 1 has acid oxidation water and the metal coil 3 coiling around the

Volta cell 1 has alkali reduction water, which efficiently removes a sticky contamination source.

In general, water of the water tank is easy to contaminate. Moreover, the water tank is mostly maintained for an extended period of time. However, the water purifying device of the present invention can efficiently treat water by applying the polarization and far infrared rays wave.

The following table shows the dissolved oxygen (DO), biochemical oxygen demand (BOD) and chemical oxygen demand (COD) measured after a predetermined period to observe water state variations of the water tank, when the water purifying device is put in the water tank.

<TABLE>

[unit : mg/l]

A measurement device of the experiment is USA HACH-DR2000 type.

Item	COD	DO	Total Nitrogen	BOD	Remarks
1 month	Below 1 (3~5)	Over 7.5 (below 5)	Below 0.3 (2~3)	Below 1.5 (1.5~2)	Values of ( ) are obtained in general water tank
3 months	Below 2 (5~10)	Over 5 (below 5)	Below 0.5 (3~5)	Below 3 (3~7)	
6 months	Below 3 (10~15)	Over 5 (below 3)	Below 0.6 (5~10)	Below 5 (7~8)	

As shown in the table, when the water purifying device is used in the water tank, the first level water is measured after one month, and the second level water is measured

after three to six months. That is, the water purifying device of the present invention restricts  $\text{NH}_3$ ,  $\text{NH}_3\text{N}$ ,  $\text{H}_2\text{S}$  and nitrate nitrogen, and remarkably reduces a density of organic substances such as bacteria of chlorophyat due to  
5 sublimation (vaporization), to stabilize the BOD, and COD for a few months.

As discussed earlier, the water purifying device of the present invention has a simple and small structure, and thus is easily installed in the water tank. Moreover, the  
10 water purifying device disinfects bacteria, restricts generation of bacteria, removes odor, and facilitates growth of aquatic plants and fishes. As a result, a number of changing water in the water tank can be considerably reduced, to improve efficiency.

15 The water purifying device of the present invention can be variously applied to a water tank of aquarium fishes, a large water tank of fry, a freshwater place such as a pond or lake, an artificial fountain, a factory using purified water, and other contained water.

What is claimed is:

1. A water purifying device comprising:

5 a cell unit having a volta cell, completed cell formed by coiling a metal coil around a Volta cell, and being surrounded with an external housing consisting of ceramic for obtaining far infrared rays and having a plurality of through holes at its whole circumferential surface for water flow;

10 a lump unit having a conductive lump and being surrounded with an external housing consisting of ceramic for obtaining far infrared rays, and having a plurality of through holes at its whole circumferential surface for water flow; and

15 a connection line for connecting the cell unit and the lump unit.

2. The device according to claim 1, wherein the Volta cell is formed in a ring shape.

20

3. The device according to claim 1, wherein the external housings of the cell unit and the lump unit have natural and familiar shapes according to scenic spots and places of historic interest or animals.

25

4. The device according to claim 1, wherein a connector is formed at the middle portion of the connection line to easily connect the cell unit and the lump unit.

## ABSTRACT OF THE DISCLOSURE

The present invention relates to a water purifying device including: a cell unit consisting of a high purity ceramic for obtaining far infrared ray, and having a shape according to a kind of water tank, a ring-shaped Volta cell consisting of a non-ferrous metal being provided in the cell unit; and a lump unit being connected to the cell unit through a metal coil, and consisting of ceramic, a conductive lump consisting of a non-ferrous metal being provided in the lump unit. Accordingly, the water purifying device is easily installed in the water tank, for disinfecting bacteria, restricting generation of bacteria, removing odor, and facilitating growth of aquatic plants and fishes. As a result, a number of changing water in the water tank can be considerably reduced, to improve efficiency.



1/2

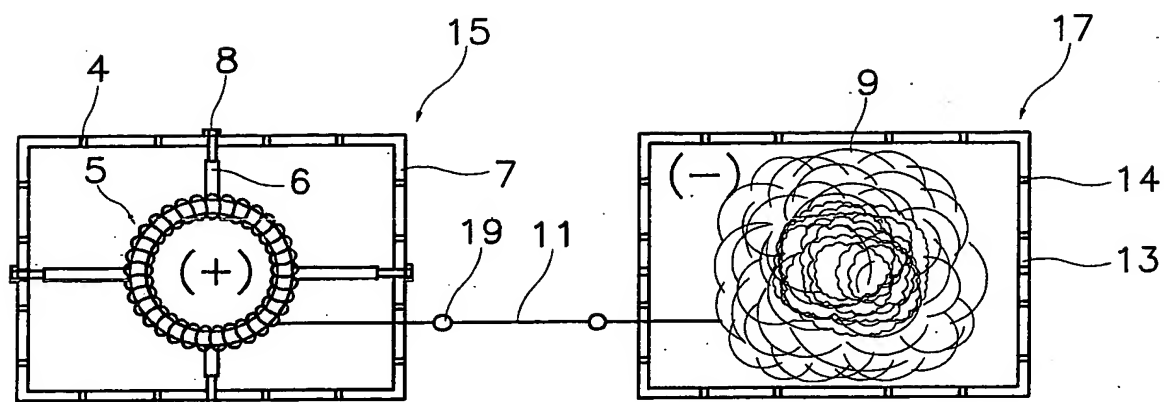


Fig. 1

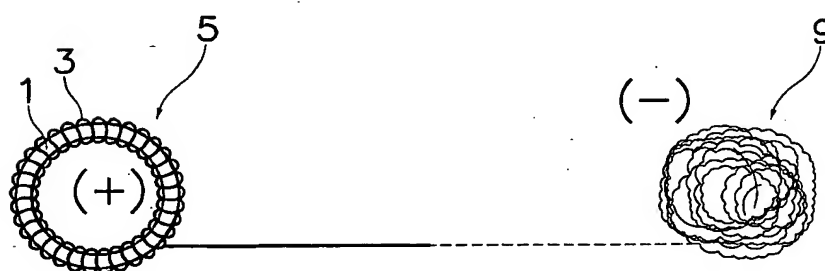


Fig. 2

2/2

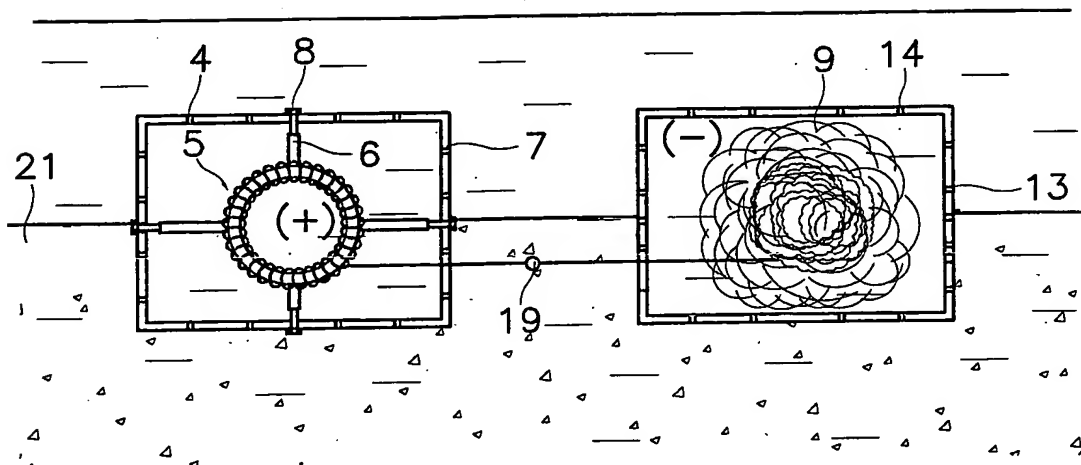


Fig.3

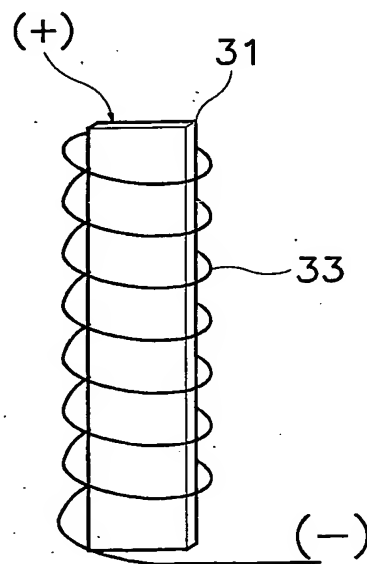


Fig.4